
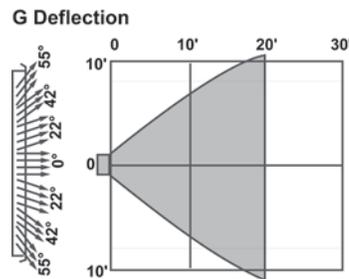
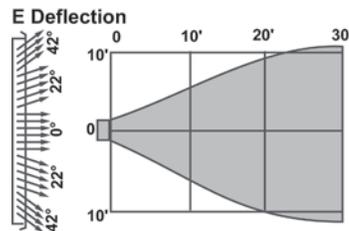
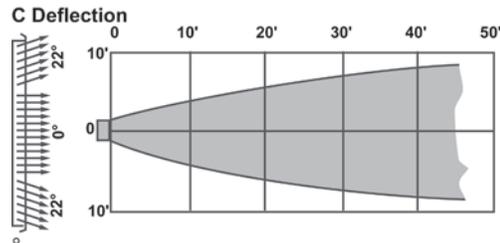


Recommended NC Criteria

	Communication Environment	Typical Occupancy
< NC 25	Extremely quiet environment; suppressed speech is quite audible; suitable for acute pickup of all sounds.	Broadcasting studios, concert halls, music rooms.
NC 30	Very quiet office; suitable for large conferences; telephone use satisfactory.	Residences, theaters, libraries, executive offices, directors rooms.
NC 35	Quiet office; satisfactory for conference at a 15-foot table; normal voice 10 to 30 feet; telephone use satisfactory.	Private offices, schools, hotel guestrooms, courtrooms, churches, hospital rooms.
NC 40	Satisfactory for conferences at a 6-to 8-foot table; normal voice 6 to 12 feet; telephone use satisfactory.	General office, labs, dining rooms.
NC 45	Satisfactory for conferences at a 4- to 5-foot table; normal voice 3 to 6 feet; raised voice 6 to 12 feet; telephone use occasionally difficult.	Retail stores, cafeterias, lobby areas, large drafting and engineering offices, reception areas.
> NC 50	Unsatisfactory for conference of more than two or three persons; normal voice 1 to 2 feet; raised voice 3 to 6 feet; telephone use slightly difficult.	Computer rooms, stenographic pools, print machine rooms, process areas.

Air Pattern Obtained with Various Deflection Settings

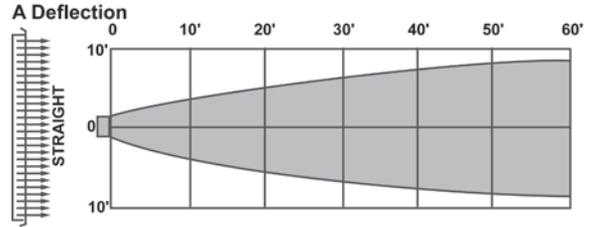

Velocity Limitations for Various Applications

The sound caused by an air outlet in operation is directly proportional to the velocity of the air passing through it. By selecting outlets of proper sizes, face velocities can be controlled within safe sound limits.

The following recommended face velocities are within the safe sound limits for most applications, when NC data are not available.

Application	Recommended Velometer Velocities
Broadcasting Studios	500 FPM
Residences	500 to 750 FPM
Apartments	500 to 750 FPM
Churches	500 to 750 FPM
Hotel Guestrooms	500 to 750 FPM
Legitimate Theaters	500 to 1000 FPM
Private Offices, acoustically treated	500 to 1000 FPM
Private Offices, not treated	1000 to 1250 FPM
Motion Picture Theaters	1000 to 1250 FPM
General Offices	1250 to 1500 FPM
Stores, upper floors	1500 FPM
Stores, main floors	1500 FPM
Industrial Buildings	1500 to 2000 FPM

Rezzin Modular Core Diffuser

		Neck Velocity FPM									
		400	500	600	700	800	900	1000	1200	1400	1600
6"	CFM	79	98	118	137	157	177	196	236	275	314
	Static Pressure	.003	.005	.007	.010	.013	.017	.021	.030	.041	.054
	Total Pressure	.018	.023	.026	.035	.043	.067	.086	.120	.166	.209
	NC	-	-	-	-	-	16	20	24	30	34
8"	CFM	140	175	209	244	279	314	349	419	489	559
	Static Pressure	.004	.006	.008	.011	.014	.017	.020	.028	.036	.045
	Total Pressure	.013	.021	.030	.041	.053	.066	.081	.115	.155	.201
	NC	-	-	-	-	17	22	24	34	37	41
10"	CFM	218	273	327	382	436	491	545	654	764	873
	Static Pressure	.004	.007	.010	.013	.017	.022	.027	.039	.053	.069
	Total Pressure	.014	.021	.031	.042	.055	.070	.086	.124	.170	.222
	NC	-	-	-	17	22	26	34	42	44	48

- Indicates less than NC15.

		Neck Velocity FPM									
		400	500	600	700	800	900	1000	1200	1400	1600
12"	CFM	314	393	471	550	628	707	785	942	1100	1257
	Static Pressure	.006	.009	.012	.017	.022	.028	.034	.048	.065	.084
	Total Pressure	.015	.024	.035	.047	.061	.077	.095	.137	.186	.242
	NC	-	-	-	20	24	27	35	40	45	49
14"	CFM	428	535	641	748	855	962	1069	1283	1497	1710
	Static Pressure	.008	.013	.018	.024	.031	.040	.048	.069	.093	.120
	Total Pressure	.017	.030	.041	.056	.071	.090	.114	.144	.200	.278
	NC	-	-	-	15	23	27	34	39	44	51
16"	CFM	559	698	838	977	1117	1257	1396	1676	1955	2234
	Static Pressure	.012	.019	.028	.037	.048	.061	.075	.107	.145	.189
	Total Pressure	.022	.034	.049	.066	.086	.108	.134	.192	.260	.339
	NC	-	-	-	24	27	31	38	40	45	51

- Indicates less than NC15.

Rezzin Mod Core Throw - Terminal Velocity of 75 FPM

Neck Velocity		400	500	600	700	800	900	1000	1200	1400	1600
CFM		79	98	118	137	157	177	196	236	275	314
6"	1-direction	3.5	4.4	5.3	6.2	7.1	7.9	8.8	10.6	12.4	14.1
	2-direction	4.5	5.6	6.8	7.9	9.0	10.2	11.3	13.6	15.8	18.1
	3-direction Short	0.9	1.1	1.3	1.5	1.7	2.0	2.2	2.6	3.0	3.5
	3-direction Long	1.2	1.5	1.8	2.1	2.5	2.8	3.1	3.7	4.3	4.9
	4-direction	0.6	0.8	0.9	1.1	1.2	1.4	1.5	1.8	2.1	2.5
CFM		140	175	209	244	279	314	349	419	489	559
8"	1-direction	3.1	3.9	4.6	5.4	6.2	7.0	7.7	9.3	10.8	12.4
	2-direction	4.4	5.5	6.6	7.7	8.8	9.9	11.0	13.2	15.4	17.6
	3-direction Short	2.0	2.5	3.0	3.5	4.0	4.5	5.0	6.0	7.1	8.1
	3-direction Long	3.5	4.4	5.3	6.2	7.0	7.9	8.8	10.6	12.3	14.1
	4-direction	1.5	1.9	2.3	2.7	3.1	3.4	3.8	4.6	5.4	6.1
CFM		218	273	327	382	436	491	545	654	764	873
10"	1-direction	6.1	7.6	9.2	10.7	12.2	13.7	15.3	18.3	21.4	24.4
	2-direction	7.1	8.9	10.7	12.5	14.3	16.1	17.8	21.4	25.0	28.5
	3-direction Short	2.1	2.6	3.1	3.7	4.2	4.7	5.2	6.3	7.3	8.4
	3-direction Long	6.4	8.0	9.6	11.2	12.8	14.4	16.0	19.2	22.4	25.6
	4-direction	2.9	3.6	4.3	5.0	5.7	6.4	7.1	8.6	10.0	11.4
CFM		314	393	471	550	628	707	785	942	1100	1257
12"	1-direction	9.8	12.2	14.7	17.1	19.6	22.0	24.5	29.3	34.2	39.1
	2-direction	9.1	11.4	13.6	15.9	18.2	20.5	22.7	27.3	31.8	36.4
	3-direction Short	3.6	4.5	5.4	6.3	7.2	8.1	9.0	10.8	12.6	14.4
	3-direction Long	8.0	10.0	12.0	14.0	16.0	18.0	20.1	24.1	28.1	32.1
	4-direction	2.1	2.6	3.1	3.7	4.2	4.7	5.2	6.3	7.3	8.4
CFM		428	535	641	748	855	962	1069	1283	1497	1710
14"	1-direction	12.1	15.1	18.2	21.2	24.2	27.3	30.3	36.3	42.4	48.5
	2-direction	8.4	10.5	12.6	14.7	16.8	18.9	21.0	25.2	29.4	33.6
	3-direction Short	3.9	4.9	5.9	6.8	7.8	8.8	9.8	11.7	13.7	15.7
	3-direction Long	7.0	8.8	10.5	12.3	14.0	15.8	17.5	21.0	24.5	28.0
	4-direction	2.8	3.5	4.2	4.9	5.6	6.3	7.0	8.4	9.8	11.2
CFM		559	698	838	977	1117	1257	1396	1676	1955	2234
16"	1-direction	24.3	30.4	36.5	42.5	48.6	54.7	60.8	72.9	85.1	97.2
	2-direction	14.1	17.6	21.1	24.6	28.1	31.7	35.2	42.2	49.3	56.3
	3-direction Short	11.2	14.0	16.8	19.7	22.5	25.3	28.1	33.7	39.3	44.9
	3-direction Long	16.3	20.4	24.5	28.6	32.7	36.7	40.8	49.0	57.1	65.3
	4-direction	3.2	4.0	4.9	5.7	6.5	7.3	8.1	9.7	11.3	12.9

Rezzin Mod Core Throw - Terminal Velocity of 150 FPM

Neck Velocity		400	500	600	700	800	900	1000	1200	1400	1600
CFM		79	98	118	137	157	177	196	236	275	314
6"	1-direction	1.5	1.9	2.3	2.6	3.0	3.4	3.8	4.2	4.5	4.9
	2-direction	1.7	2.1	2.5	3.0	3.4	3.8	4.2	4.7	5.1	5.5
	3-direction Short	0.6	0.7	0.9	1.0	1.2	1.3	1.5	1.6	1.8	1.9
	3-direction Long	0.3	0.4	0.4	0.5	0.6	0.7	0.7	0.8	0.9	0.9
	4-direction	0.6	0.7	0.8	1.0	1.1	1.2	1.4	1.5	1.7	1.8
CFM		140	175	209	244	279	314	349	419	489	559
8"	1-direction	1.6	2.1	2.5	2.9	3.3	3.7	4.1	4.5	4.9	5.4
	2-direction	1.7	2.1	2.5	2.9	3.3	3.8	4.2	4.6	5.0	5.4
	3-direction Short	1.3	1.6	1.9	2.3	2.6	2.9	3.2	3.5	3.9	4.2
	3-direction Long	1.5	1.9	2.2	2.6	3.0	3.3	3.7	4.1	4.5	4.8
	4-direction	1.1	1.4	1.6	1.9	2.2	2.5	2.7	3.0	3.3	3.6
CFM		218	273	327	382	436	491	545	654	764	873
10"	1-direction	3.0	3.7	4.5	5.2	6.0	6.7	7.5	8.2	9.0	9.7
	2-direction	2.8	3.5	4.1	4.8	5.5	6.2	6.9	7.6	8.3	9.0
	3-direction Short	1.5	1.9	2.2	2.6	3.0	3.4	3.7	4.1	4.5	4.8
	3-direction Long	2.5	3.1	3.7	4.3	5.0	5.6	6.2	6.8	7.4	8.1
	4-direction	2.3	2.9	3.4	4.0	4.6	5.2	5.7	6.3	6.9	7.5
CFM		314	393	471	550	628	707	785	942	1100	1257
12"	1-direction	3.4	4.3	5.2	6.0	6.9	7.8	8.6	9.5	10.3	11.2
	2-direction	2.1	2.6	3.1	3.6	4.1	4.7	5.2	5.7	6.2	6.7
	3-direction Short	2.4	3.0	3.6	4.2	4.8	5.4	6.0	6.7	7.3	7.9
	3-direction Long	2.1	2.6	3.1	3.6	4.1	4.7	5.2	5.7	6.2	6.7
	4-direction	1.7	2.1	2.5	2.9	3.3	3.8	4.2	4.6	5.0	5.4
CFM		428	535	641	748	855	962	1069	1283	1497	1710
14"	1-direction	5.3	6.6	7.9	9.3	10.6	11.9	13.2	14.5	15.9	17.2
	2-direction	3.0	3.8	4.6	5.3	6.1	6.8	7.6	8.3	9.1	9.9
	3-direction Short	2.3	2.9	3.5	4.1	4.6	5.2	5.8	6.4	6.9	7.5
	3-direction Long	2.6	3.2	3.9	4.5	5.1	5.8	6.4	7.1	7.7	8.4
	4-direction	2.2	2.7	3.2	3.8	4.3	4.9	5.4	5.9	6.5	7.0
CFM		559	698	838	977	1117	1257	1396	1676	1955	2234
16"	1-direction	14.9	18.6	22.3	26.0	29.7	33.5	37.2	40.9	44.6	48.3
	2-direction	7.0	8.7	10.4	12.2	13.9	15.6	17.4	19.1	20.9	22.6
	3-direction Short	5.2	6.5	7.8	9.1	10.4	11.7	13.0	14.3	15.6	16.9
	3-direction Long	6.7	8.4	10.0	11.7	13.4	15.1	16.7	18.4	20.1	21.8
	4-direction	2.0	2.5	3.0	3.5	4.0	4.5	5.0	5.5	6.0	6.6

